


High Stability Tcxo 12.8 Mhz 16mhz 24.576 Mhz Aluminum Material

Our Product Introduction

for more products please visit us on zrhitech.com

Basic Information

- Place of Origin: CHINA
- Brand Name: ZR Hi-Tech
- Model Number: LT-CR-TC-50M-1409
- Minimum Order Quantity: 1
- Packaging Details: carton packing
- Delivery Time: 4 weeks
- Payment Terms: T/T



LT-CR-TC-50M-1409

Product Specification

- Features: Three-stage Bell Temperature Crystal Oscillator, Optional Three-state Control Function, High Precision, Low Phase Noise, There Are Anti-overload Products For Choice, Anti-overload > 30000g
- Product Name: LT-CR Series Temperature-compensated Voltage Controlled Crystal Oscillator
- Application: Satellite Communication, Military Communication Equipment, Base Station, Test And Measurement Equipment
- Material: Aluminum
- Temperature: $\pm 0.3\text{ppm} \sim \pm 2\text{ppm}$
- Frequency Range: 10MHz~60MHz
- Voltage: 3.3V~ 5V Option
- Color: Silver
- Highlight: **high stability tcxo , tcxo 16mhz , tcxo 24.576 mhz**

Product Description

10MHz~60MHz LT-CR series temperature-compensated voltage controlled crystal oscillator

Quick Detail:

- Aluminum housing
- 3.3V~ 5V VDD options
- -55°C~85°C operating temperature
- Small package
- High precision
- Low phase noise
- Optional three-state control function
- Suprious $\leq -75\text{dBm}$
- CE, RoHS, REACH compliant
- 1 Year Warranty

Description:


The LT-CR-TC-50M-1409 is the newest addition to ZR's line of TCXOs. The standard part offers an ultra-tight stability of $\pm 0.3\text{ppm} \sim \pm 2\text{ppm}$ over -55°C to +85°C across a supply voltage range of 3.3V~ 5V. The LT-CR uses a high refresh rate, or frequency calibration rate, to maintain a linear frequency output during temperature compensation. The 14.3 mm x 9.3 mm x 4.5 mm ceramic package and options for 1,000- or 3,000-piece reels make these components ideal for satellite communication, military communication equipment, base station, test and measurement equipment.

Specifications:

Electrical / Optical Characteristics (Ta=25°C $\pm 3^\circ\text{C}$)

Items	specification	Condition
Part Number	LT-CR-TC-50M-1409	
Frequency Range	50M, 10MHz~60MHz	
Operating Voltage(VDD)	3.3V~ 5V	
Operating Temperature	-55°C~85°C	
Frequency Stability vs. Temperature	$\pm 0.3\text{ppm} \sim \pm 2\text{ppm}$	Relative to frequency @25°C
Frequency Tolerance	$\leq \pm 1\text{ppm}$	@25°C $\pm 5^\circ\text{C}$
Output Waveform	C:CMOS X:Clipped Sine Wave	
Output Load	50 Ω	
Harmonic	$\leq -30\text{dBc}$	
Suprious	$\leq -75\text{dBc}$	
Voltage-controlled voltage	0V~5V or 0V~3.3V	
Absolute Pull Range	$\leq \pm 5\text{ppm}$	
Output Power	8dBm~10dBm	
Phase Noise	-145dBc/Hz@1kHz	50MHz typical
	-155dBc/Hz@10kHz	
	-155dBc/Hz@100kHz	
Dimension	14.3 $\times$ 9.3 $\times$ 4.5mm	

Outline Drawing (Unit: mm):

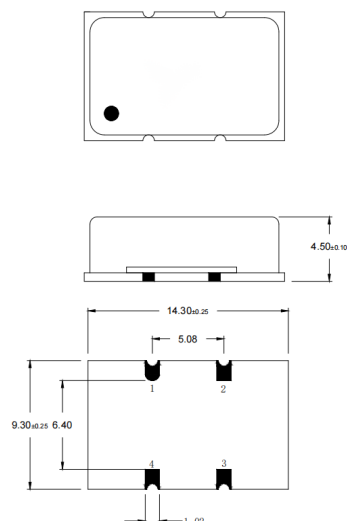



13541202623



info@zrhitech.com



zrhitech.com

No.1411, Zhuye Building, 100 Xingping Road, Jinniu District, Chengdu, Sichuan Province, CHINA