Surface Acoustic Wave Saw Resonators 364.925MHz To 365.075MHz

Basic Information

Place of Origin: CHINA
 Brand Name: ZR Hi-Tech
 Model Number: LT-SR-365-3070

Minimum Order Quantity:

Packaging Details: carton packing
Delivery Time: 4 weeks
Payment Terms: T/T





Product Specification

Highlight: High impedance surface acoustic wave

resonators

, surface acoustic wave resonators 364.925MHz,

acoustic wave resonators 364.925MHz

Product Description

LT-SR-365-3070 LT-SR Series SAW Resonators with Frequency Range 364.925MHz to 365.075MHz **364.925MHz to 365.075MHz LT-SR Series SAW Resonator**

Quick Detail:

- · Aluminum Housing
- · -40°C~+85°C Operating Temperature
- · SMD Package
- · DC Voltage: 30V
- · RF Power Dissipation: 0dBm
- · CE, RoHS, REACH Compliant
- · 1 Year Warranty

Description:


The LT-SR-365-3070 from ZR is a SAW Resonator with Frequency 364.925MHz to 365.075 MHz, Centre Frequency 365 MHz, Insertion Loss 1.5 to 2.0 dB, Quality Factor Loaded 12000. Tags: Surface Mount, SAW Resonator. More details for LT-SR-365-3070 can be seen below.

Specifications:

Electrical / Optical Characteristics (Ta=25°C±3°C)


Part Number : LT-SR-365-3070						
Item		Unites	Min.	Тур.	Max.	
Center Frequency		MHz	364.925	365.000	365.075	
Insertion Loss		dB		1.5	2.1	
Quality Factor Unload Q				12000		
50Ω Loaded Q				1500		
Temperature	Turnover Temperature	°C	10	25	40	
Stability	Freq.temp.Coefficient	ppm/°C2		0.032		
Frequency Aging		ppm/yr		≤±10		
DC. Insulation Resistance		ΜΩ	1.0			
RF Equivalent RLC Model	Motional Resistance R1	Ω		-		
	Motional Inductance L1	μН		-		
	Motional Capacitance C1	fF		-		
Transducer Static Capacitance		pF		-		
Note: for custom specs, please contact us directly.						

Outline Drawing (Unit: mm):



Pin	Configuration		
1	Input		
3	Output		
2	Case Ground		

Typical Frequency Response

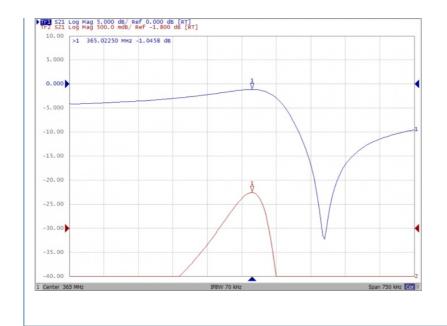

₹ZRHITECH Sichuan ZR Hi-Tech Ltd.

13541202623

info@zrhitech.com

No.1411, Zhuye Building, 100 Xingping Road, Jinniu District, Chengdu, Sichuan Province, CHINA