

Surface Acoustic Wave SAW Resonators 369.925MHz To 370.075MHz

Our Product Introduction

Basic Information

- Place of Origin: CHINA
- Brand Name: ZR Hi-Tech
- Model Number: LT-SR-370-3070
- Minimum Order Quantity: 1
- Packaging Details: carton packing
- Delivery Time: 4 weeks
- Payment Terms: T/T



Product Specification

- Highlight: Surface acoustic wave SAW resonators,
SAW resonators 369.925MHz,
SAW resonators 370.075MHz

Product Description

LT-SR-370-3070 LT-SR Series SAW Resonators with Frequency Range 369.925MHz to 370.075MHz
369.925MHz to 370.075MHz LT-SR Series SAW Resonator

Quick Detail:

- Aluminum Housing
- -40°C~+85°C Operating Temperature
- SMD Package
- DC Voltage: 30V
- CE, RoHS, REACH Compliant
- 1 Year Warranty

Description:

The LT-SR-370-3070 from ZR is a SAW Resonator with Frequency 369.925MHz to 370.075 MHz, Centre Frequency 370 MHz, Insertion Loss 1.5 to 2.2 dB, Quality Factor Loaded 12000. Tags: Surface Mount, SAW Resonator. More details for LT-SR-370-3070 can be seen below.


Specifications:

Electrical / Optical Characteristics (Ta=25°C±3°C)

Part Number : LT-SR-370-3070					
Item		Unites	Min.	Typ.	Max.
Center Frequency		MHz	369.925	370.000	370.075
Insertion Loss		dB		1.5	2.2
Quality Factor Unload Q				12000	
50Ω Loaded Q				1500	
Temperature Stability	Turnover Temperature	°C	10	25	40
	Freq.temp.Coefficient	ppm/°C ²		0.037	
	Frequency Aging	ppm/yr		≤±10	
	DC. Insulation Resistance	MΩ	1.0		
RF Equivalent RLC Model	Motional Resistance R1	Ω		-	
	Motional Inductance L1	μ H		-	
	Motional Capacitance C1	fF		-	
	Transducer Static Capacitance	pF		-	


Note: for custom specs, please contact us directly.


Outline Drawing (Unit: mm):

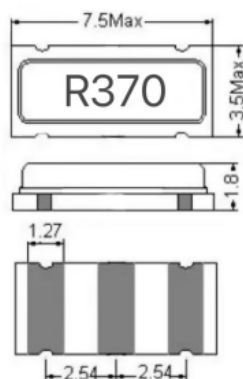

Pin	Configuration
1	Input
3	Output
2	Case Ground

Typical Frequency Response

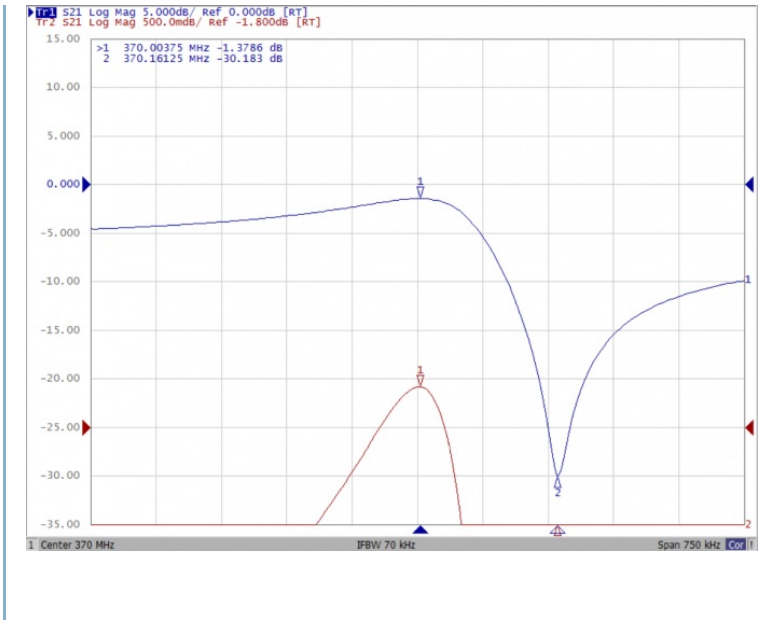

 **ZRHTECH** Sichuan ZR Hi-Tech Ltd.



13541202623



info@zrhitech.com



zrhitech.com

No.1411, Zhuye Building, 100 Xingping Road, Jinniu District, Chengdu, Sichuan Province, CHINA