

Frequency Range 5MHz-200MHz Ultra Stable OCXO Wide Temperature Range 20.0mm*20.0mm

Our Product Introduction

for more products please visit us on zrhitech.com

Basic Information

- Place of Origin: CHINA
- Brand Name: ZR Hi-Tech
- Model Number: LT-CR-BO2020A
- Minimum Order Quantity: 1
- Packaging Details: carton packing
- Delivery Time: 4 weeks
- Payment Terms: T/T



Product Specification

- Features: Low Phase Noise
- Product Name: Oven Controlled Crystal Oscillator (OCXO)
- Application: Satellite Communications, Base Stations, Measuring Instruments, Etc
- Material: Aluminum
- Temperature: -55~85°C
- Frequency Range: 5MHz~200MHz
- Voltage: 3.3V/5.0V
- Color: Black
- Highlight: **200MHz OCXO, 200MHz OCXO, 20.0mm*20.0mm OCXO**

Product Description

5MHz to 200MHz 20.0mm*20.0mm, Wide Temperature Range, Ultra Stable OCXO

Quick Detail:

- Aluminum housing
- 3.3V/5V Operating Voltage (VCC)
- -55°C~+85°C operating temperature
- SMD package
- High precision
- Low phase noise
- CMOS or Sine Wave Output Waveform
- CE, RoHS, REACH compliant
- 1 Year Warranty

Description:


The LT-CR-bo2020a is the newest addition to ZR's line of OCXOs. We provide sinewave or CMOS output waveforms with a phase noise of -100dBc/100MHz (at 10Hz offset) and have a frequency stability of ± 50 ppb (vs. temperature). These OCXOs are fabricated using an SC-cut crystal that offers high stability and low aging. They are available in surface-mount packages that measure 20.0 x 20.0 x 10.5 mm. These OCXOs are ideal for satellite communications, base stations, measuring instruments, etc...

Specifications:

Electrical / Optical Characteristics (Ta=25°C±3°C)

Items	Specification	Conditions
Part Number	LT-CR-bo2020a	
Frequency Range	5MHz~200MHz	
Operating Voltage(VCC)	3.3V/5.0V	
Setup Power Consumption	≤4W	
Operating Temperature	-55°C~85°C	
Frequency Stability vs. Temperature	≤±50ppb	-55°C ~ +85°C
Frequency Tolerance	≤±0.3ppm	At shipment, nominal EFC, +25°C
Output Waveform	Sine Wave	
Output Impedance		
Output Power		
Control Voltage(VC)	3.3V~5V	
Voltaged Frequency Range		
Slope	Positive	
Linearity	10%	
Input Impedance		
Phase Noise (typ.)	-100dBc/Hz@10Hz -130dBc/Hz@100Hz -155dBc/Hz@1kHz -160dBc/Hz@10kHz -170dBc/Hz@100kHz	Typical Frequency:100MHz At +25°C
Dimension	20.0 x 20.0 x 10.5 mm	
Note: for custom specs, please contact us directly.		

Outline Drawing (Unit: mm):

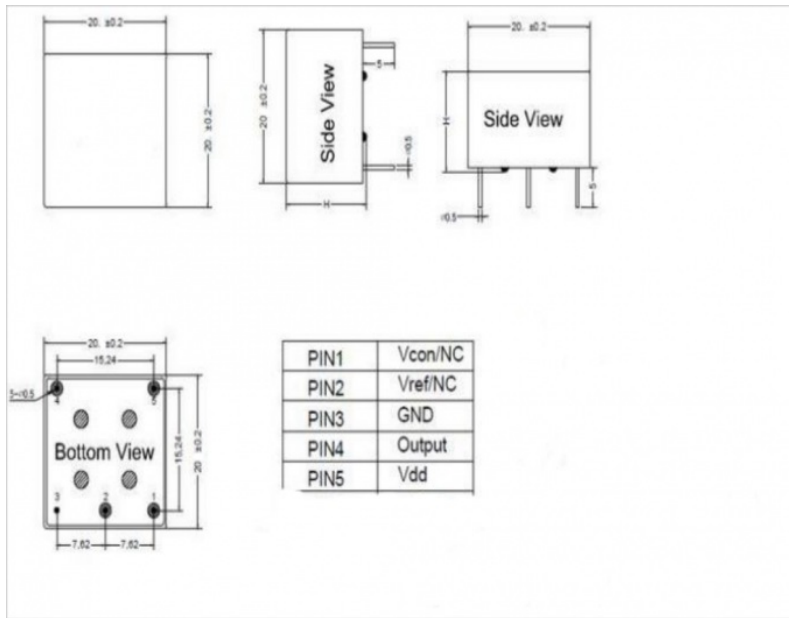

 **ZRHTECH** Sichuan ZR Hi-Tech Ltd.



13541202623



info@zrhitech.com



zrhitech.com

No.1411, Zhuye Building, 100 Xingping Road, Jinniu District, Chengdu, Sichuan Province, CHINA