


9.3*14.6mm Silver TCXO Frequency Range 50MHz-156.25MHz Ultra Stable And Low Phase Noise

Our Product Introduction

Basic Information

- Place of Origin: CHINA
- Brand Name: ZR Hi-Tech
- Model Number: LT-CR-BT0914AM
- Minimum Order Quantity: 1
- Packaging Details: carton packing
- Delivery Time: 4 weeks
- Payment Terms: T/T

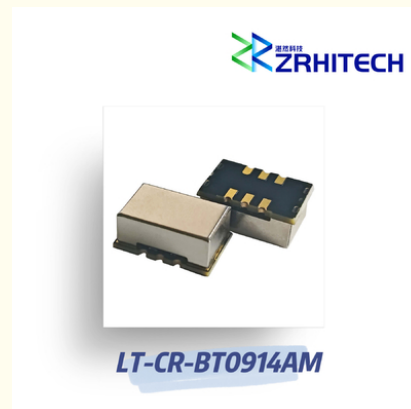

Product Specification

- Features: Three-stage Bell Temperature Crystal Oscillator, Optional Three-state Control Function, High Precision, Low Phase Noise, There Are Anti-overload Products For Choice, Anti-overload > 30000g
- Product Name: LT-CR Series Temperature-compensated Crystal Oscillator
- Application: Satellite Communication, Military Communication Equipment, Base Station, Test And Measurement Equipment
- Material: Aluminum
- Temperature: -40°C ~ +85°C
- Frequency Range: 50MHz~156.25MHz
- Voltage: 3.3/5V
- Color: Silver
- Highlight: **Low Phase Noise TCXO Frequency Range, 14.6mm TCXO Frequency Range, Ultra Stable TCXO Frequency Range**

for more products please visit us on zrhitech.com

Product Description

50MHz to 156.25MHz 9.3*14.6mm, Ultra Stable, Low Phase Noise TCXO

Quick Detail:

- Aluminum housing
- 3.3/5V VDD options
- -40°C~85°C operating temperature
- Small package
- High precision
- Low phase noise
- Optional three-state control function
- CE, RoHS, REACH compliant
- 1 Year Warranty

Description:


The LT-CR-BT0914AM is the newest addition to ZR's line of TCXOs. The standard part offers an ultra-tight stability of $\pm 0.5\text{ppm}$ to $\pm 3.0\text{ppm}$ over -40°C to +85°C across a supply voltage range of 3.3V/5.0V. The LT-CR-bt0914a(M) uses a high refresh rate, or frequency calibration rate, to maintain a linear frequency output during temperature compensation. The 9.3 mm x 14.6 mm ceramic package and options for 1,000- or 3,000-piece reels make these components ideal for satellite communication, military communication equipment, base station, test and measurement equipment.


Specifications:

Electrical / Optical Characteristics (Ta=25°C±3°C)

Items	specification	Condition
Part Number	LT-CR-bt0914a(M)	
Frequency Range	50MHz~156.25MHz	
Operating Voltage(VCC)	3.3V/5.0V	
Operating Temperature	-40°C~+85°C	
Freq. Stability Vs. Temp.	$\pm 0.5\text{ppm}$ ~ $\pm 3.0\text{ppm}$	-40°C~+85°C
Frequency Tolerance	$\pm 0.5\text{ppm}$ ~ $\pm 1.0\text{ppm}$	At shipment, nominal EFC, +25°C
Output Waveform	LVC MOS, Sine wave	
Voltage-controlled voltage	1.5V±1.5V	
Absolute Pull Range	± 5 ~ $\pm 12\text{ppm}$	
Phase Noise	<-75dBc@10Hz <-110dBc@100Hz <-140dBc@1kHz <-155dBc@10kHz <-155dBc@10kHz	@100MHz At +25°C
Overload Resistance		
Dimension	9.3*14.6mm	

Outline Drawing (Unit: mm):

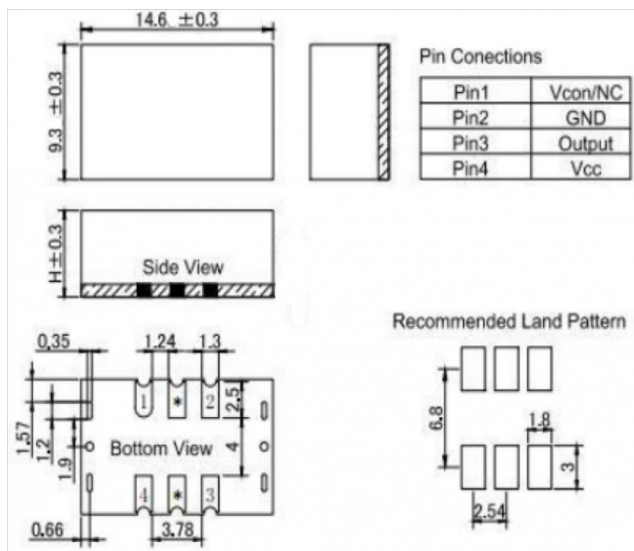

 **Sichuan ZR Hi-Tech Ltd.**

☎ 13541202623 ✉ info@zrhitech.com 🌐 zrhitech.com

No.1411, Zhuye Building, 100 Xingping Road, Jinniu District, Chengdu, Sichuan Province, CHINA