

20×12mm Vibration Insensitive TCXO Oscillators High Precision Low Phase Noise Aluminum Frequency Range 50-156.25MHz

Our Product Introduction

Basic Information

- Place of Origin: CHINA
- Brand Name: ZR Hi-Tech
- Model Number: LT-CR-BT1220Z
- Minimum Order Quantity: 1
- Packaging Details: carton packing
- Delivery Time: 4 weeks
- Payment Terms: T/T



Product Specification

- Features: Three-stage Bell Temperature Crystal Oscillator, Optional Three-state Control Function, High Precision, Low Phase Noise, There Are Anti-overload Products For Choice, Anti-overload > 30000g
- Product Name: LT-CR Series Temperature-compensated Crystal Oscillator
- Application: Satellite Communication, Military Communication Equipment, Base Station, Test And Measurement Equipment
- Material: Aluminum
- Temperature: -50°C ~ +85°C
- Frequency Range: 50MHz~156.25MHz
- Voltage: 3.3/5V
- Color: Silver
- Highlight: **Vibration Insensitive TCXO Oscillators, Low Phase Noise TCXO Oscillators, 156.25MHz TCXO Oscillators**

for more products please visit us on zrhitech.com

Product Description

50~156.25MHz 20×12mm, Vibration Insensitive, High Precision & Low Phase noise TCXO

Quick Detail:

- Aluminum housing
- 3.3/5V VDD options
- -50°C~85°C operating temperature
- Small package
- High precision
- Low phase noise
- Optional three-state control function
- CE, RoHS, REACH compliant
- 1 Year Warranty

Description:


The LT-CR-BT1220Z is the newest addition to ZR's line of TCXOs. The standard part offers an ultra-tight stability of ± 0.2 ppm to ± 2.0 ppm over -50°C to +85°C across a supply voltage range of 3.3V / 5.0V. The bt1220-z uses a high refresh rate, or frequency calibration rate, to maintain a linear frequency output during temperature compensation. The 20.2 mm x 12.6 mm x 7.35 mm ceramic package and options for 1,000- or 3,000-piece reels make these components ideal for satellite communication, military communication equipment, base station, test and measurement equipment.


Specifications:

Electrical / Optical Characteristics (Ta=25°C±3°C)

Items	specification	Condition
Part Number	bt1220-z	
Frequency Range	50MHz~156.25MHz	
Operating Voltage(VCC)	3.3V / 5V	
Operating Temperature	-50°C~+85°C	
Freq. Stability Vs. Temp.	± 0.2 ppm ~ ± 2.0 ppm	-20°C~+70°C@Height above 6mm
Frequency Tolerance	± 0.5 ppm~ ± 1.5 ppm	At shipment, nominal EFC, +25°C
Output Waveform	Sine Wave	
Voltage-controlled voltage	1.5V±1.0V	
Absolute Pull Range		
Phase Noise	<-145dBc@50~100MHz	@1kHz
	<-140dBc@50~100MHz@102.4~122.88MHz	
	<-135dBc@50~100MHz@102.4~122.88MHz@125~156.25MHz	
	<-130dBc@50~100MHz@102.4~122.88MHz@125~156.25MHz	
Overload Resistance		
Dimension	20.2 mm x 12.6 mm x 7.35 mm	

Outline Drawing (Unit: mm):

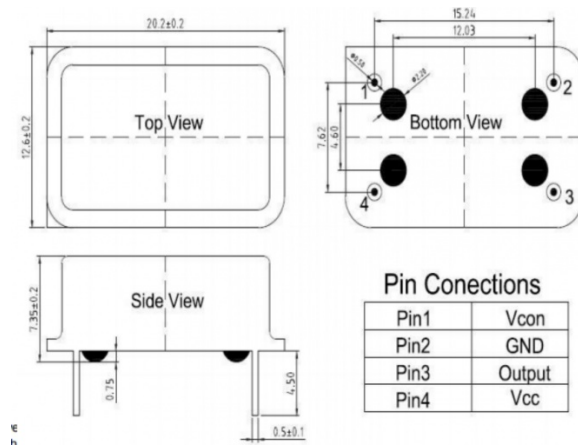

 **ZRHTECH** Sichuan ZR Hi-Tech Ltd.



13541202623



info@zrhitech.com



zrhitech.com

No.1411, Zhuye Building, 100 Xingping Road, Jinniu District, Chengdu, Sichuan Province, CHINA