

SAW Resonators(声表谐振器)

309.925MHz to 310.075MHz LT-SR Series SAW Resonator

Quick Detail:

- Aluminum Housing
- -40℃~+85℃ Operating Temperature
- SMD Package
- DC Voltage: 10V
- RF Power Dissipation: 0dBm
- CE, RoHS, REACH Compliant
- 1 Year Warranty

Description:


The LT-SR-310-3070 from ZR is a SAW Resonator with Frequency 309.925MHz to 310.075MHz, Centre Frequency 310 MHz, Insertion Loss 1.5 to 2.2 dB, Quality Factor Loaded 12800. Tags: Surface Mount, SAW Resonator. More details for LT-SR-310-3070 can be seen below.

Specifications:

Electrical / Optical Characteristics (Ta=25℃±3℃)

Part Number : LT-SR-310-3070					
Item		Unites	Min.	Typ.	Max.
Center Frequency		MHz	309.925	310.000	310.075
Insertion Loss		dB		1.5	2.2
Quality Factor Unload Q				12800	
50Ω Loaded Q				2000	
Temperature Stability	Turnover Temperature	℃	10	25	40
	Freq.temp.Coefficient	ppm/℃2		0.037	
Frequency Aging		ppm/yr		≤10	
DC. Insulation Resistance		MΩ	1.0		
RF Equivalent RLC Model	Motional Resistance R1	Ω		16	25
	Motional Inductance L1	μH		156.50	
	Motional Capacitance C1	fF		1.63	
Note: for custom specs, please contact us directly.					

Outline Drawing (Unit: mm):

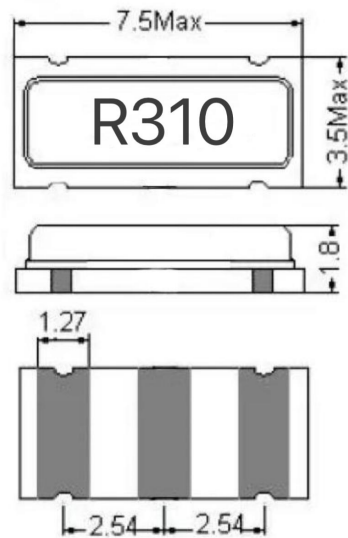

Pin	Configuration
1	Input
3	Output
2	Case Ground

Typical Frequency Response

