


32 To 38 GHz 32dBm Power Amplifier with 43.5 dB Small Signal Gain

Our Product Introduction

for more products please visit us on zrhitech.com

Basic Information

- Place of Origin: CHINA
- Brand Name: ZR Hi-Tech
- Model Number: LT-PA-320380-G43P24
- Minimum Order Quantity: 1
- Packaging Details: carton packing
- Delivery Time: 4 weeks
- Payment Terms: T/T

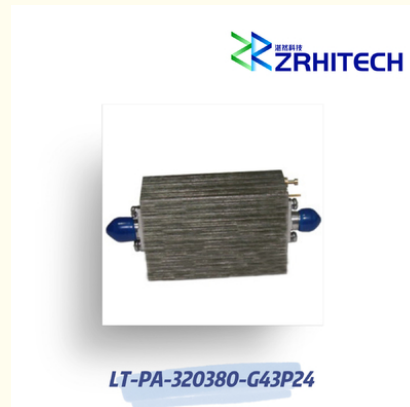

Product Specification

- Product Name: LT-PA Series Power Amplifier
- Application: Wireless Communication
- Material: Aluminum
- Temperature: -40~85°C
- Frequency Range: 32 To 38 GHz
- Color: Silver
- Highlight: **32dBm Power Amplifier,**
43.5 dB Power Amplifier,
32 To 38 GHz Power Amplifier

Product Description

32 to 38 GHz LT-PA Series Power Amplifier

Quick Detail:

- Aluminum Housing
- Customizable Frequency
- -40°C~+85°C Operating Temperature
- Small Signal Gain 24dB
- CE, RoHS, REACH compliant
- 1 Year Warranty

Description:


The LT-PA-320380-G43P24 from ZR is a RF Amplifier with Frequency 32 to 38 GHz, Small Signal Gain 43.5 dB, Gain Flatness ± 2.5 dB, Output Power 32dBm, Input Power 5 dBm. Tags: Power Amplifier. More details for LT-PA-320380-G43P24 can be seen below.

Specifications:

Electrical / Optical Characteristics (Ta=25°C \pm 3°C)

Items	Specification	Conditions
Part Number	LT-PA-320380-G43P24	
Configuration	Module with Connector	
Frequency Range	32 to 38 GHz	
Small Signal Gain	43.5 dB	
Gain Flatness	± 2.5 dB	
Output Power	32 dBm	
Input Power	5 dBm	
VSWR	2.2:1	
Power Supply	+12V / 450mA	
Operating Temperature	-40 to +70 °C	
Dimension	44.7*29.5*17.3 mm	
Note: for custom specs, please contact us directly.		

Outline Drawing (Unit: mm):

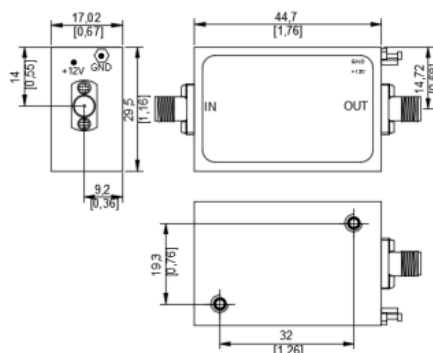

 **ZRHITECH** Sichuan ZR Hi-Tech Ltd.

 13541202623  info@zrhitech.com  zrhitech.com

No.1411, Zhuye Building, 100 Xingping Road, Jinniu District, Chengdu, Sichuan Province, CHINA