

2.6 To 6 GHz 15dBm Power Amplifier with 16dB Small Signal Gain

Our Product Introduction

Basic Information

- Place of Origin: CHINA
- Brand Name: ZR Hi-Tech
- Model Number: LT-PA-026060-G16P15
- Minimum Order Quantity: 1
- Packaging Details: carton packing
- Delivery Time: 4 weeks
- Payment Terms: T/T



LT-PA-026060-G16P15

Product Specification

- Product Name: LT-PA Series Power Amplifier
- Application: Wireless Communication
- Material: Aluminum
- Temperature: -40~85°C
- Frequency Range: 2.6 To 6 GHz
- Color: Silver
- Highlight: **ultra low noise rf amplifier,
High Frequency Amplifiers,
High Frequency rf amplifier 16dB**

for more products please visit us on zrhitech.com

Product Description

2.6 to 6 GHz LT-PA Series Power Amplifier

Quick Detail:

- Aluminum Housing
- Customizable Frequency
- -40°C~+85°C Operating Temperature
- Small Signal Gain 16dB
- CE, RoHS, REACH compliant
- 1 Year Warranty

Description:


The LT-PA-026060-G16P15 from ZR is a RF Amplifier with Frequency 2.6 to 6 GHz, Small Signal Gain 16 dB, Gain Flatness ± 1.0 dB, Output Power 15dBm, Input Power 10 dBm. Tags: Power Amplifier. More details for LT-PA-026060-G16P15 can be seen below.

Specifications:

Electrical / Optical Characteristics (Ta=25°C \pm 3°C)

Items	Specification	Conditions
Part Number	LT-PA-026060-G16P15	
Configuration	Module with Connector	
Frequency Range	2.6 to 6 GHz	
Small Signal Gain	16 dB	
Gain Flatness	± 1.0 dB	
Output Power	15 dBm	
Input Power	10 dBm	
VSWR	1.9:1	
Power Supply	+5V / TBD mA	
Operating Temperature	-55 to +85 °C	
Dimension	34.4*16.8*8.1 mm	
Note: for custom specs, please contact us directly.		

Outline Drawing (Unit: mm):

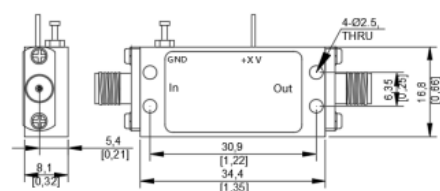

ZRHITECH Sichuan ZR Hi-Tech Ltd.



13541202623



info@zrhitech.com



zrhitech.com

No.1411, Zhuye Building, 100 Xingping Road, Jinniu District, Chengdu, Sichuan Province, CHINA