

0.6 to 2.7 GHz 10 Watt LT-PD Series 16-Way Power Divider

Our Product Introduction

Basic Information

- Place of Origin: CHINA
- Brand Name: ZR Hi-tech
- Model Number: LT-PD-16S-006027
- Minimum Order Quantity: 1
- Packaging Details: carton packing
- Delivery Time: 4 weeks
- Payment Terms: D/A,D/P,T/T



LT-PD-16S-006027

Product Specification

- Highlight: 16 Way Power Divider

for more products please visit us on zrhitech.com

Product Description

0.6 to 2.7 GHz 16-Way Power Divider

Quick Detail:

- 16-Way Power Divider
- Stripline Design
- $-40^{\circ}\text{C}\sim+70^{\circ}\text{C}$ operating temperature
- 0.6 to 2.7 GHz Frequency Range
- Max Power 10 Watt
- Insertion Loss < 2.5 dB
- Isolation > 18 dB
- CE, RoHS, REACH compliant
- 1 Year Warranty

Description:

The LT-PD-16S-006027 from ZR is a 16-way power divider that operates from 0.6 to 2.7 GHz and can handle up to 10 Watt (CW) with 2.5 dB max insertion loss and 18 dB min isolation. The package interface uses SMA-Female connectors and is REACH and RoHS compliant. More details for LT-PD-16S-006027 can be seen below.


Specifications:

Electrical / Optical Characteristics (Ta=25°C±3°C)

Items	Specification	Conditions
Part Number	LT-PD-16S-006027	
Frequency Range	0.6 to 2.7 GHz	
Impedance	50 Ohms	
Input VSWR	1.5:1 Max.	
Output VSWR	1.5:1 Max.	
Insertion Loss	2.5 dB Max.	Excluding Nominal Splitter Loss 3.0dB
Isolation	18 dB Min.	
Amplitude Balance	2.0 dB Max.	
Phase Balance	20 Degrees Max.	
Input Power	10 kW	
Connectors	SMA-Female	
Dimension	218x116x10 mm	

Note: for custom specs, please contact us directly.

Outline Drawing (Unit: mm):

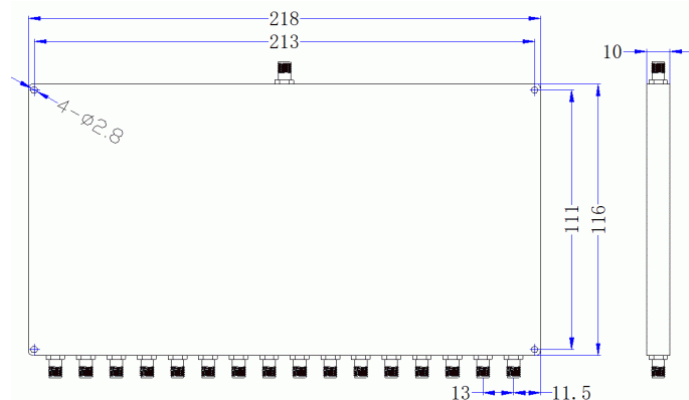

Sichuan ZR Hi-Tech Ltd.



13541202623



info@zrhitech.com



zrhitech.com

No.1411, Zhuye Building, 100 Xingping Road, Jinniu District, Chengdu, Sichuan Province, CHINA