0.6 to 2.7 GHz 50 Watt LT-PD Series 2-Way Power Divider

Basic Information

Place of Origin: CHINABrand Name: ZR Hi-tech

Model Number: LT-PD-2S-006027

Minimum Order Quantity:

Packaging Details: carton packing
Delivery Time: 4 weeks
Payment Terms: D/A,D/P,T/T



Product Specification

• Highlight: 50 Watt Power Divider

Product Description

0.6 to 2.7 GHz 2-Way Power Divider

Quick Detail:

- · 2-Way Power Divider
- · Stripline Design
- · -45°C~+85°C operating temperature
- · 0.6 to 2.7 GHz Frequency Range
- · Max Power 50 Watt
- · Insertion Loss < 0.6 dB
- · Isolation > 20 dB
- · CE, RoHS, REACH compliant
- · 1 Year Warranty

Description:


The LT-PD-2S-006027 from ZR is a 2-way power divider that operates from 0.6 to 2.7 GHz and can handle up to 50 Watt (CW) with 0.6 dB max insertion loss and 20 dB min isolation, The package interface uses N-Female connectors and is REACH and RoHS compliant. More details for LT-PD-2S-006027 can be seen below.

Specifications:

Electrical / Optical Characteristics (Ta=25°C±3°C)

Items	Specification	Conditions
Part Number	LT-PD-2S-006027	
Frequency Range	0.6 to 2.7 GHz	
Impedance	50 Ohms	
Input VSWR	1.3:1 Max.	
Output VSWR	1.3:1 Max.	
Insertion Loss	0.6 dB Max.	Excluding Nominal Splitter
		Loss 3.0dB
Isolation	20 dB Min.	
Amplitude Balance	0.4 dB Max.	
Phase Balance	6 Degrees Max.	
Input Power	50 kW	
Connectors	N-Female	
Dimension	50x56x18 mm	
Note: for custom spec	s, please contact us directly	у.

Outline Drawing (Unit: mm):

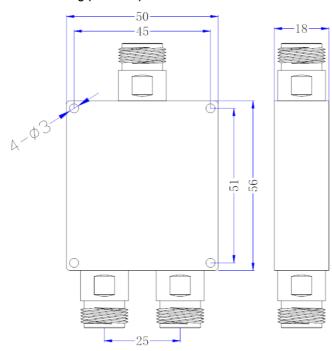

≪ZRHITECH Sichuan ZR Hi-Tech Ltd.

13541202623

info@zrhitech.com

g zrhitech.com

No.1411, Zhuye Building, 100 Xingping Road, Jinniu District, Chengdu, Sichuan Province, CHINA