18.0 to 40.0 GHz 20 Watt LT-PD Series 2-Way Power Divider

Basic Information

• Place of Origin:

Brand Name:

zrhitech.com

Model Number: LT-PD-2S-180400

CHINA

1

ZR Hi-tech

4 weeks D/A,D/P,T/T

Sichuan ZR Hi-Tech Ltd.

- Minimum Order Quantity:
- Packaging Details: carton packing
- Delivery Time:
- Payment Terms:



Product Specification

• Highlight:

40.0 GHz Power Divider, 18.0 GHz Power Divider , 18.0 to 40.0 GHz Power Divider

18.0 to 40.0 GHz 2-Way Power Divider

Quick Detail:

- · 2-Way Power Divider
- · Stripline Design
- -55°C~+85°C operating temperature
- 18.0 to 40.0 GHz Frequency Range
- · Max Power 20 Watt
- · Insertion Loss < 1.5 dB
- · Isolation > 18 dB
- · CE, RoHS, REACH compliant
- · 1 Year Warranty


Description:

The LT-PD-2S-180400 from ZR is a 2-way power divider that operates from 18.0 to 40.0 GHz and can handle up to 20 Watt (CW) with 1.5 dB max insertion loss and 18 dB min isolation, The package interface uses 2.92mm-Male connectors and is REACH and RoHS compliant. More details for LT-PD-2S-180400 can be seen below.

Specifications:

Electrical / Optical Characteristics (Ta=25°C±3°C)

| Items | Specification | Conditions |
|-----------------------|-------------------------------|----------------------------|
| Part Number | LT-PD-2S-180400 | |
| Frequency Range | 18.0 to 40.0 GHz | |
| Impedance | 50 Ohms | |
| Input VSWR | 1.6:1 Max. | |
| Output VSWR | 1.6:1 Max. | |
| Insertion Loss | 1.5 dB Max. | Excluding Nominal Splitter |
| | | Loss 3.0dB |
| Isolation | 18 dB Min. | |
| Amplitude Balance | 0.6 dB Max. | |
| Phase Balance | 8 Degrees Max. | |
| Input Power | 20 kW | |
| Connectors | 2.92mm-Female | |
| Dimension | 21.6x26.9x12.7 mm | |
| Note: for custom spec | s, please contact us directly | |

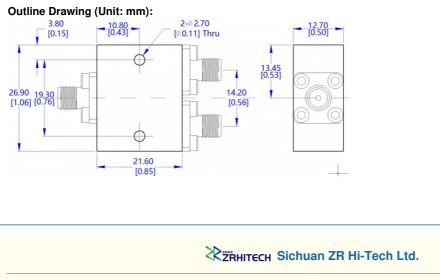

13541202623 info@zrhitech.com

C zrhitech.com

No.1411, Zhuye Building, 100 Xingping Road, Jinniu District, Chengdu, Sichuan Province, CHINA