

6 to 26.5 GHz 20 Watt LT-PD Series 16-Way Power Divider

Our Product Introduction

Basic Information

- Place of Origin: CHINA
- Brand Name: ZR Hi-tech
- Model Number: LT-PD-16S-060265
- Minimum Order Quantity: 1
- Packaging Details: carton packing
- Delivery Time: 4 weeks
- Payment Terms: D/A,D/P,T/T



LT-PD-16S-060265

Product Specification

- Highlight: 6 to 26.5 GHz Power Divider

for more products please visit us on zrhitech.com

Product Description

6 to 26.5 GHz 16-Way Power Divider

Quick Detail:

- 16-Way Power Divider
- Stripline Design
- -55°C~+85°C operating temperature
- 6 to 26.5 GHz Frequency Range
- Max Power 20 Watt
- Insertion Loss < 4.4 dB
- Isolation > 16 dB
- CE, RoHS, REACH compliant
- 1 Year Warranty

Description:


The LT-PD-16S-060265 from ZR is a 16-way power divider that operates from 6 to 26.5 GHz and can handle up to 20 Watt (CW) with 4.4 dB max insertion loss and 16 dB min isolation. The package interface uses SMA-Female connectors and is REACH and RoHS compliant. More details for LT-PD-16S-060265 can be seen below.

Specifications:

Electrical / Optical Characteristics (Ta=25°C±3°C)

Items	Specification	Conditions
Part Number	LT-PD-16S-060265	
Frequency Range	6 to 26.5 GHz	
Impedance	50 Ohms	
Input VSWR	1.7:1 Max.	
Output VSWR	1.7:1 Max.	
Insertion Loss	4.4 dB Max.	Excluding Nominal Splitter Loss 3.0dB
Isolation	16 dB Min.	
Amplitude Balance	1.4 dB Max.	
Phase Balance	16 Degrees Max.	
Input Power	20 kW	
Connectors	SMA-Female	
Dimension	44.5x210x12.7 mm	
Note: for custom specs, please contact us directly.		

Outline Drawing (Unit: mm):

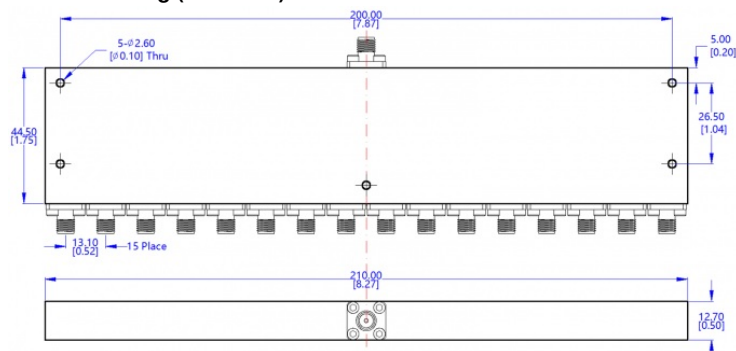

 **Sichuan ZR Hi-Tech Ltd.**



13541202623



info@zrhitech.com



zrhitech.com

No.1411, Zhuye Building, 100 Xingping Road, Jinniu District, Chengdu, Sichuan Province, CHINA