# 0.02 to 1 GHz 0dBm Low Noise Amplifier with 25 dB Small Signal Gain

#### **Basic Information**

Place of Origin: CHINABrand Name: ZR Hi-tech

Model Number: LT-LA-000010-G25P0

Minimum Order Quantity:

Packaging Details: carton packing
Delivery Time: 4 weeks
Payment Terms: D/A,D/P,T/T



### Product Specification

#### 0.02 to 1 GHz 0dBm Low Noise Amplifier with 25 dB Small Signal Gain

#### **Quick Features**

Aluminum housing for durability

Customizable frequency options

Wide operating temperature range: -40°C to +70°C

25dB small signal gain

Compliance with CE, RoHS, and REACH standards

1-year manufacturer warranty

#### **Product Overview**


The LT-LA-000010-G25P0 from ZR is a high-performance RF amplifier operating in the 0.02 to 1 GHz frequency range. This module features 25 dB small signal gain with  $\pm 1.5$  dB gain flatness, delivering 0dBm output power with 10 dBm input power.

#### **Technical Specifications**

Parameter	Specification	Conditions
Part Number	LT-LA-000010-G25P0	
Configuration	Module with Connector	
Frequency Range	0.02 to 1 GHz	
Small Signal Gain	25 dB	
Gain Flatness	±1.5 dB	
Output Power	0 dBm	
Input Power	10 dBm	
VSWR	2.0:1	
Power Supply	+12V / 200 mA	
Operating Temperature	-40 to +70 °C	
Dimensions	40×25×12 mm	

Note: Contact us directly for custom specifications.

#### **Outline Drawing**

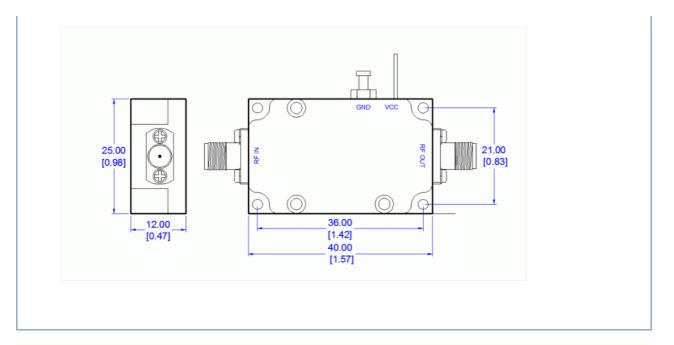

## ₹ZRHITECH Sichuan ZR Hi-Tech Ltd.

13541202623

info@zrhitech.com

g zrhitech.com

No.1411, Zhuye Building, 100 Xingping Road, Jinniu District, Chengdu, Sichuan Province, CHINA