# 2 to 18 GHz 10 Watts LT-DC Series 6dB Directional Coupler

# **Basic Information**

Place of Origin: CHINA
 Brand Name: ZR Hi-Tech
 Model Number: LT-DC6-020180S

Minimum Order Quantity:

Packaging Details: carton packing
Delivery Time: 4 weeks
Payment Terms: T/T,D/A,D/P



# Product Specification

# **Product Description**

# 2 to 18 GHz 6dB Directional Coupler

#### **Quick Detail:**

- ·6dB Directional Coupler
- · Directivity > 14 dB
- · 2 to 18 GHz Frequency Range
- · Lost VSWR < 1.5:1
- · Coupling 6±1.0 dB
- · Max Power 10 Watts(CW)
- · CE, RoHS, REACH compliant
- · 1 Year Warranty

# **Description:**


The LT-DC6-020180S from ZR is a 6dB Directional Coupler that operates from 2 to 18 GHz and can handle up to 10 Watt (CW) with 14 dB directivity min and 1.5:1 VSWR max, The package interface uses SMA Female connectors and is REACH and RoHS compliant. More details for LT-DC6-020180S can be seen below.

# Specifications:

Electrical / Optical Characteristics (Ta=25°C±3°C)

Items	Specification	Conditions
Part Number	LT-DC6-020180S	
Frequency Range	2 to 18 GHz	
Coupling	6±1.0 dB	
Impedance	50 Ohms	
Main Line VSWR	1.5:1 Max.	
Coupling VSWR	1.5:1 Max.	
Insertion Loss	2.1 dB Max.	
Frequency Balance	1.6 dB Max.	
Directivity	14 dB Min.	
Input Power	10 W	
Connectors	SMA Female	
Weight	50 g	
Dimension	57.2x17.8x12.7 mm	
Note: for custom spec	s, please contact us directly	•

#### Outline Drawing (Unit: mm):

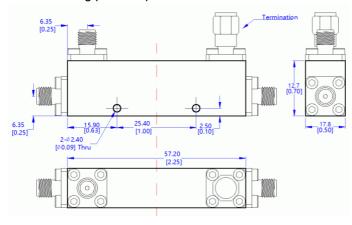

# ZRHITECH Sichuan ZR Hi-Tech Ltd.

