0.5 to 8 GHz 20 Watts LT-DC Series 16dB Directional Coupler

Basic Information

Place of Origin: CHINA
Brand Name: ZR Hi-Tech
Model Number: LT-DC16-005080S

Minimum Order Quantity:

Packaging Details: carton packing
Delivery Time: 4 weeks
Payment Terms: T/T,D/A,D/P



Product Specification

Product Description

0.5 to 8 GHz 16dB Directional Coupler

Quick Detail:

- · 16dB Directional Coupler
- · Directivity > 16 dB
- · 0.5 to 8 GHz Frequency Range
- · Lost VSWR < 1.25:1
- · Coupling 16±0.5 dB
- · Max Power 20 Watts(CW)
- · CE, RoHS, REACH compliant
- · 1 Year Warranty

Description:


The LT-DC16-005080S from ZR is a 16dB Directional Coupler that operates from 0.5 to 8 GHz and can handle up to 20 Watt (CW) with 16 dB directivity min and 1.25:1 VSWR max, The package interface uses SMA Female connectors and is REACH and RoHS compliant. More details for LT-DC16-005080S can be seen below.

Specifications:

Electrical / Optical Characteristics (Ta=25°C±3°C)

Items	Specification	Conditions
Part Number	LT-DC16-005080S	
Frequency Range	0.5 to 8 GHz	
Coupling	16±0.5 dB	
Impedance	50 Ohms	
Main Line VSWR	1.25:1 Max.	
Coupling VSWR	1.25:1 Max.	
Insertion Loss	0.9 dB Max.	
Frequency Balance	1.2 dB Max.	
Directivity	16 dB Min.	
Input Power	20 W	
Connectors	SMA Female	
Weight	100 g	
Dimension	111.8x17.8x12.7 mm	
Note: for custom spec	s, please contact us directly	•

Outline Drawing (Unit: mm):

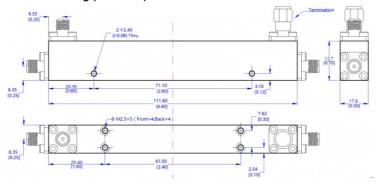

ZRHITECH Sichuan ZR Hi-Tech Ltd.



13541202623



info@zrhitech.com



zrhitech.com